


ILBDWPP55X17-1

55x17 mm

Web direction

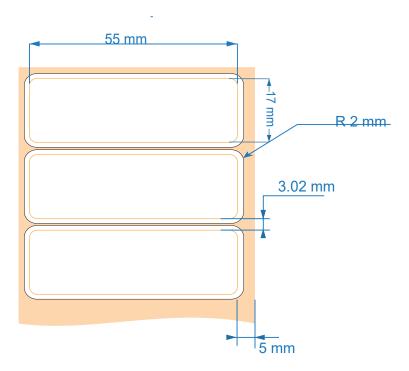


IDANIM PN :ILBDWPP55X17-1 CUST PN: 9220122 Importance of the CUSTOMER APPROVAL: Packaging MATERIAL : DURABLE POL DRAWING NR. : scrolling direction NAME: WINDING: OUT INNER CORE: 1 SIGNATURE: X IMPORTANT Knife number: 5434 TOLERANCE: ± 0,5 mm STAMP: SCALE: NOT IMPORTANT COLORS : WHITE 5 ♠♦ ↓ Format: **IDANIM** CUTTING LINE **DATE** :1.8.24 REVISION: 01 Idanim creative solutions: Moshe Hess St 7, Lod, Israel, Tel: 08-6225629 Fax: 08-6225629 e- mail: sales@idanimltd.com

לקוח יקר - הצבעים הינם להמחשה בלבד לכן ייתכנו סטיות בגוון הצבע בין תצוגת מסך לצבע המודפס



WHITE GLOSS POL FILM





General Description:

A thermal transfer printable polyester film with print receptive top-coat, high performance extra permanent acrylic adhesive and glassine liner. This product can be delivered in white, silver and colored polyester.

Face stock



A gloss white polyester film. The smooth surface is covered with a topcoat for excellent ink anchorage.

Thickness:

SI Units Test Method 250 micron ASTM D 3652

Adhesive



The adhesive is a permanent acrylic adhesive with good initial tack and high ultimate adhesion onto a variety of substrates including apolar plastics and lacquers

Thickness:
Adhesion from:
Stainless Steel
Glass
Polypropylene
Automotive Paint
PBT
Shear
Probe Track

SI Units	Test Method
27 micron	ASTM D 3652
21 N/ 25mm	FTM 1 (72 hour dwell)
22 N/ 25mm	FTM 1 (72 hour dwell)
18 N/ 25mm	FTM 1 (72 hour dwell)
19 N/ 25mm	FTM 1 (72 hour dwell)
18 N/ 25mm	FTM 1 (72 hour dwell)
50 Hours	FTM 8 (1h dwell /2kg wheit)
720 (459) gram/sq cm	ASTM d 2979

Liner



The liner is a supercalendered glassine paper.

Caliper:

ASTM D 3652



Shelf life

Material is stable for two years stored at max 21 °C and 50% relative humidity. Damp conditions, excessive heat and/or freezing conditions should be avoided.

Moshe Hess St 7, Lod, Israel Tel: 08-6225629, Fax: 08-6225629 e-mail: sales@idanimltd.com