

General Description:

This white vellum paper is a surface-sized, supercalendered woodfree printing paper, made from FSC® certified materials. It is designed for general-purpose labeling and provides good print resolution for picket fence barcodes and numeric data with thermal transfer print speeds up to 150mm/sec.



PRODUCT SPECIFICATIONS:

Print Technology: Thermal Transfer

Material Type: White Vellum Paper

Adhesive: Removable Rubber-Based Adhesive

APPLICATIONS: This economical multipurpose paper is ideal for print & apply, warehouse inventory labeling, and other in-house product identification labels. It provides good print quality where a gloss surface finish is not required. The adhesive is suitable for a wide range of substrates, including polymeric materials (PET, PP, ABS, PS), greeting cards, aluminum, stainless steel, and glass. However, it is not suitable for window labeling.


PHYSICAL PROPERTIES:

- **Basis Weight (Facestock):** 68 g/m² (ISO 536)
- **Caliper (Facestock):** 66 µm (ISO 534)
- **Basis Weight (Liner):** 53 g/m² (ISO 536)
- **Caliper (Liner):** 46 µm (ISO 534)
- **Total Caliper:** 133 µm ± 10% (ISO 534)
- **Adhesive Performance:**
 - **Initial Tack:** 2.5 N/25mm (FTM 9, Glass)
 - **Peel Adhesion 90°:** 1.5 N/25mm (FTM 2, Stainless Steel)
 - **Minimum Application Temperature:** -20°C
 - **Service Temperature Range:** -40°C to 80°C



IDANIM
CREATIVE SOLUTIONS

WHITE VELLUM PAPER

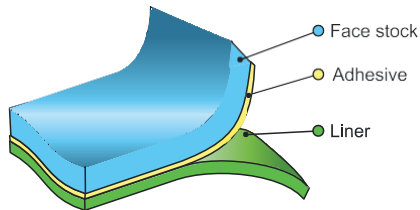

STORAGE AND SHELF LIFE: To obtain optimal performance, use this product within two years of the date of manufacture. Store under conditions defined by FINAT (20-25°C; 40-50% RH). Prolonged storage outside these conditions might reduce the shelf life.